




NSM/NSM2 Spring Mount (Deflection : 25mm, 50mm)



■ Features

It is a closed spring mount with excellent anti-vibration effects. Because the spring is not exposed to the outside, it is corrosion-resistant and it has a gauge at the center to help check deflection. The top and bottom housings are made of POLYCARBONATE plastic, which is stable regardless of load and strength, and anti-friction inside the housing reduces structure-borne noise. Plus, the anti-vibration neoprene pad on the top and bottom contact surfaces prevents structure-borne noise from getting transferred to the base of the equipment when it is in contact with STEEL and concrete.

■ Usage

- ◆ For ventilators
- ◆ For air handling units
- ◆ For pumps and standing pipes
- ◆ For equipment with large horizontal reaction

■ Specification

No.	Name of Components	Material	Standard
1	Lower Non Skin Pad	CR	KS M 6617
2	Lower Housing	E-PLASTIC	-
3	Upper Housing	E-PLASTIC	-
4	Coil Spring	SUP9	KS B 2402
		HSW3	KS B 2403
5	Upper Non Skid Pad	CR	KS M 6617
6	Level Bolt	SS400	KS B 1012





■ Dimension & Selection Guide

Type	Capacity(kgf)	Spring Constant(kgf/mm)	Weight(kg)	Deflection(mm)	Dimension(mm)					
					A	B	C	D	H	Level Blot
NSM-A-25	25	1	0.44	25	132	104	74	13	115	M10 x 60
NSM-A-50	50	2	0.46							
NSM-A-75	75	3	0.50							
NSM-A-100	100	4	0.54							
NSM-B-150	150	6	1.16							
NSM-B-200	200	8	1.22		170	134	99	14	143	M12 x 65
NSM-B-300	300	12	1.36							
NSM-B-400	400	16	1.38							
NSM-C-500	500	20	2.08							
NSM-C-600	600	24	2.14							
NSM-C-750	750	30	2.22	50	190	152	110	14	167	M16 x 80
NSM2-50	50	1	2.44							
NSM2-100	100	2	2.50							
NSM2-150	150	3	2.46							
NSM2-200	200	4	2.50							
NSM2-300	300	6	2.70							
NSM2-400	400	8	3.06							
NSM2-500	500	10	2.76							
NSM2-600	600	12	2.62							
NSM2-750	750	15	2.92							

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.

NSM/NSM2 Spring Mount (Deflection : 25mm, 50mm)

■ NSM Test Data

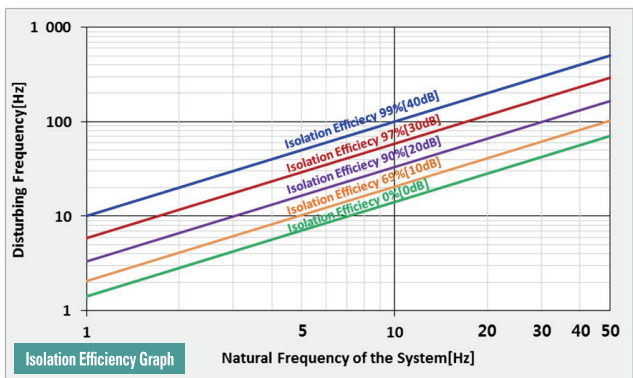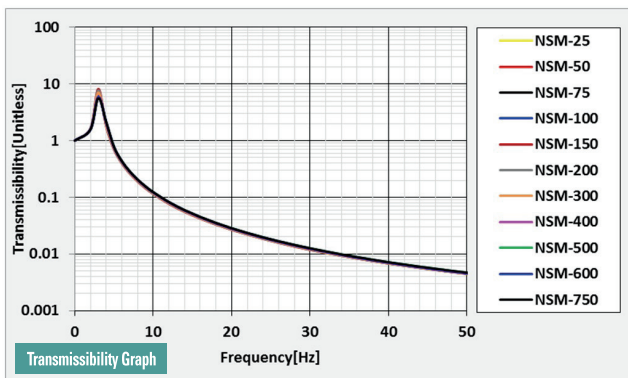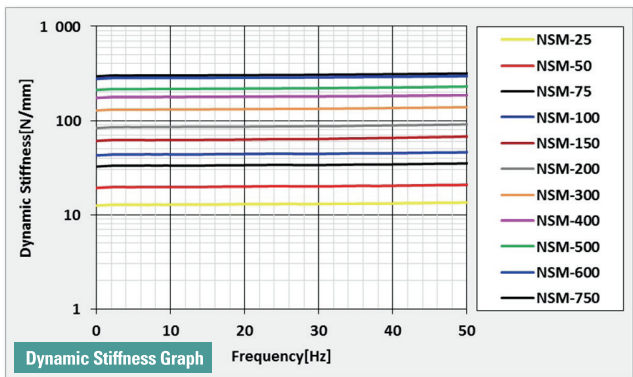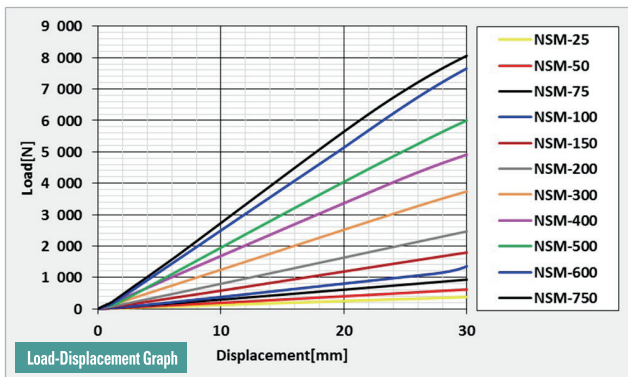

■ NSM2 Test Data

