
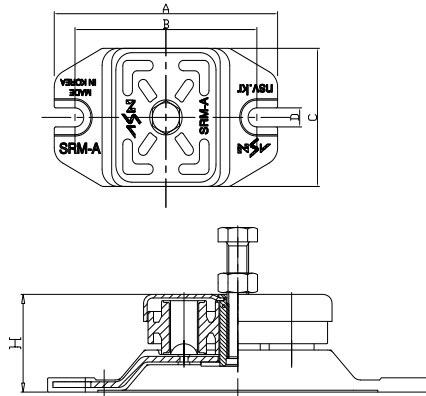


# SRM Spring Rubber Mount (Deflection : 5.5mm)



## ■ Features

It is an improved, mount version of SRP type spring rubber pad taking advantage of anti-vibration rubber and metal spring. SRM type enables control of the level to reduce horizontal deflection. Moreover, its external housing is made of stainless steel to prevent corrosion when installed outside.

## ■ Usage

- ◆ For facilities and equipment (for example, PUMP, AHU and FAN)
- ◆ For industrial equipment (including Press, Shearing Machine and Lathe)
- ◆ For all kinds of equipment installed on a solid base
- ◆ For vertical and horizontal pipes

## ■ Specification

No.	Name of Components	Material	Standard
1	Level Bolt	SS400	KS B 1002
2	Nut	SS400	KS B 1002
3	UPPER HOUSING	STS304	KS D 3698
4	SRP PAD	SUP9	KS B 2402
		CR	KS M 6617
5	LOWER HOUSING	CR	KS M 6617
		SS400	KS D 3503

## ■ Dimension & Selection Guide

Type	Capacity (kgf)	Deflection (mm)	Weight (kg)	Dimension(mm)					
				A	B	C	D	H	Level Bolt
SRM-100	100	5.5	0.52	140	114	80	11	52	M10 x 60
SRM-200	200								
SRM-400	400		1.42	212	183	108	13	55	M12 x 65
SRM-600	600								
SRM-800	800		3.33	290	259	130	13	55	M12 x 65
SRM-1000	1000								
SRM-1200	1200								
SRM-1500	1500								
SRM-2000	2000								

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.

## ■ Installation Features

